

Agile S NI Accessories

Datasheet



Accessories for use in hazardous areas

Accessories are approved for:


- ATEX: Zone 2/22 (EPS 19 ATEX 1 179 X)
- IECEx: Zone 2/22 (EPS 19.0079X)
- NEC: Class I Div 2 (CSA File 180267)



Standard battery

Description	<ul style="list-style-type: none"> – Lithium polymer battery 7.4 V/5140 mAh (38,04 Wh) – Hot-swappable <p>May only be changed and charged outside hazardous areas!</p>
-------------	--

Order no.	B7-A2Z0-0055
-----------	--------------

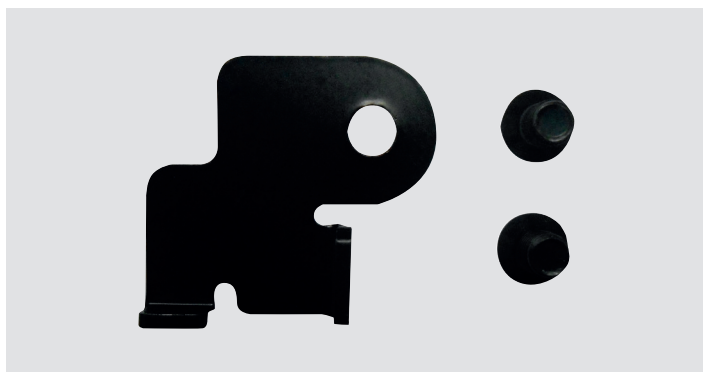

Battery lock

Description	Enables battery locking for prevent accidental removal
-------------	--

Order no.	03-9827-0004
-----------	--------------



Screen protector

Description	<ul style="list-style-type: none"> – certified in combination with Agile S NI – 3 pieces <p>May only be changed outside hazardous areas!</p>
-------------	--

Order no.	B7-A2Z0-0031
-----------	--------------



Radio module 4G/LTE (US)

Description	Sierra Wireless module MC7455
	<ul style="list-style-type: none"> - Suitable for Agile S and Agile S NI - Support: 4G - LTE
	Category: Cat-6
	Bands: B1, B2, B3, B4, B5, B7, B8, B12, B13, B20, B25, B26, B29, B30, B41
	3G - WCDMA (DC-HSPA+/HSPA+/HSPA/ UMTS) Bands: B1, B2, B3, B4, B5, B8
	May only be changed outside hazardous areas!
Order no.	03-9826-0157



Radio module 4G/LTE (Asia/Pacific + South America)

Description	Sierra Wireless module MC7430
	<ul style="list-style-type: none"> - Suitable for Agile S and Agile S NI - Support: 4G - LTE
	Category: Cat-6
	Bands: B1, B3, B5, B7, B8, B18, B19, B21, B28, B38, B39, B40, B41
	3G - WCDMA (DC-HSPA+/HSPA+/HSPA/ UMTS) Bands: B1, B5, B6, B8, B9, B19
	3G - TD-SCDMA Bands: B39
	May only be changed outside hazardous areas!
Order no.	03-9826-0159



Radio module 4G/LTE (EU + Korea + Taiwan)

Description	Sierra Wireless module MC7455
	<ul style="list-style-type: none"> - Suitable for Agile S and Agile S NI - Support: 4G - LTE
	Category: Cat-6
	Bands: B1, B2, B3, B4, B5, B7, B8, B12, B13, B20, B25, B26, B29, B30, B41
	3G - WCDMA (DC-HSPA+/HSPA+/HSPA/ UMTS) Bands: B1, B2, B3, B4, B5, B8
	May only be changed outside hazardous areas!
Order no.	03-9826-0206



Dual stylus

Description	<ul style="list-style-type: none"> - Suitable for capacitive touchscreen - 1 piece - With spiral cord
Order no.	03-9849-0151



Leather carry case

- | | |
|-------------|---|
| Description | <ul style="list-style-type: none"> - Suitable with Agile S and Agile S NI - With practical stand function and holder for stylus - Access to battery possible - Upgradable with shoulder strap and 4-point belt - Robust industry quality leather |
|-------------|---|

Order no.	03-9829-0122
-----------	--------------



4-point belt

- | | |
|-------------|---|
| Description | <ul style="list-style-type: none"> - Suitable for leather carry case of Tablet PC Series Agile - Ergonomic back trace with shoulder pad for safe carrying in front of the body - Easy and secure fitting on leather carry case using coloured pop fasteners - Adjustable strap length |
|-------------|---|

Order no.	03-9829-0092
-----------	--------------



Shoulder strap

- | | |
|-------------|---|
| Description | <ul style="list-style-type: none"> - Suitable for leather carry case of Tablet PC Series Agile - Ergonomic and soft shoulder pad - Adjustable strap length |
|-------------|---|

Order no.	03-9829-0091
-----------	--------------



Hand strap

- | | |
|-------------|---|
| Description | <ul style="list-style-type: none"> - Suitable for Agile S and Agile S NI - 1 piece - To be mounted on the back of the Table PC |
|-------------|---|

Order no.	03-9849-0155
-----------	--------------

Accessories for use outside hazardous areas



2-slot battery charging station

Description	<ul style="list-style-type: none"> - Suitable with Agile S and Agile S NI - For charging 2 batteries - Input voltage: DC 10 V to 20 V (50 W) - Charge indicator by LED and buzzer - Two charging stations can be charged with one power supply
Scope of delivery	<ul style="list-style-type: none"> - 2-slot battery charging station - Power supply - AC power cable (EU + US)
Order no.	03-9914-0010



Docking station

Description	<ul style="list-style-type: none"> - Suitable for Agile S and Agile S NI - Input voltage: DC 12 V to 19 V - Charging with inserted battery
Interfaces	<ul style="list-style-type: none"> - 4 x USB 2.0 - 1 x RS232 - 1 x Ethernet 10/100 Mbit/s - 1 x VGA - 1 x Charging port
Scope of delivery	<ul style="list-style-type: none"> - Docking station - Quick start guide (EN)
Also required	(not included with delivery) Power supply, AC power cable (EU + US)
Order no.	03-9915-0017



Docking station

Description	<ul style="list-style-type: none"> - Suitable for Agile Tablet PC Series - Input voltage: DC 19 V - Charging with inserted battery
Interfaces	<ul style="list-style-type: none"> - 4 x USB 2.0 - 1 x RS232 - 1 x Ethernet 10/100 Mbit/s - 1 x HDMI - 1 x Charging port
Scope of delivery	<ul style="list-style-type: none"> - Docking Station - Mounting bracket - Screws for mounting bracket (6 pieces) - Fixation elements (2 pieces) - Inserts for Agile X (2 pieces) - Screws for insert (2 pieces) - Rubber pads (4 pieces) - Power supply - Power cable (EU + US) - Quick start guide (EN)
Order no.	03-9914-0022



Power supply

Description	<ul style="list-style-type: none"> - suitable for Agile Tablet PC Series - Input voltage: AC 100 V to 240 V - Output voltage: DC 19 V/3.42 A
-------------	---

Order no.	03-9911-0040
-----------	--------------



AC power cable

Description	3-wire, country-specific
-------------	--------------------------

Order no.	Version: EU 03-9609-0022 Version: US 03-9609-0023
-----------	--

	Other country specific cables have to be purchased locally!
--	---



Micro HDMI cable

Description	Micro HDMI (Male) to HDMI (Male)
-------------	----------------------------------

Order no.	03-9919-0024
-----------	--------------